

# FLEXITRAILER FT-TR-S




## Technische gegevens

Geschikt voor

Schoteldruk  
 Maximale aslast per as  
 Totaal toegestane massa  
 Leeggewicht  
 Nuttig laadvermogen  
 Schotelhoogte  
 Chassishoogte  
 Bandenmaat  
 Elektrische aansluitingen



## Technische Daten

Geeignet für

Sattellast  
 Max. Achslast per Achse  
 Gesamt zulässige Masse  
 Leergewicht  
 Nutzlast  
 Sattelhöhe  
 Chassishöhe  
 Reifengröße  
 Elektrische Anschlüsse



## Technical data



Suitable for

Kingpin weight  
 Maximal Axleload / axle  
 Gross trailer weight  
 Empty weight  
 Payload  
 Fifthwheel height  
 Chassisheight  
 Tyresize  
 Electrical connectors

## FT-TR-S

20 ft rear  
 30 ft  
 2x 20 ft  
 40 ft (HC)  
 16.000 kg  
 9.000 kg  
 43.000 kg  
 4.500 kg  
 38.500 kg  
 1.110 mm  
 1.110 mm  
 385/55 R22,5  
 2x 7-pin + 1x 15 pin

**OPTIES / OPTIONEN / OPTIONS**

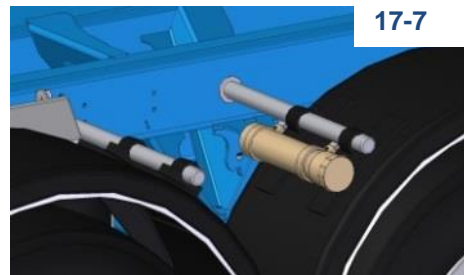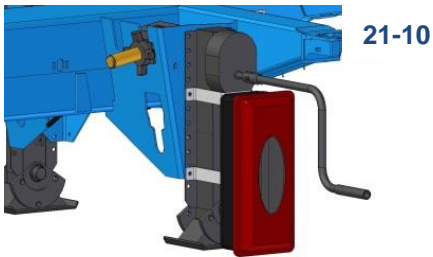

		
Basis opties	Basis Optionen	Basic options
11-4-15 Valx trommelremmen As 1 liftas manueel / automatisch	Valx Trommelbremsen Achse 1 Liftachse man. / automatisch	Valx drumbrakes Axle 1 liftaxle manual / automatic
19-55 Bandenmaat 385/55R22,5	Reifengröße 385/55 R22,5	Tyresize 385/55 R22,5
19-B Banden keus D-TEC 1 laag 2K natlak RAL 5015 / 9005	Reifen nach Wahl D-TEC 1 Schicht 2K RAL 5015 / 9005	Tyremake D-TEC choice 1-Layer coating 2K RAL 5015 / 9005
09-1-2 Bovenzijde schooperen	Oberseite spritzverzinkt	Topside schooping
21-5 2 Wielkeggen	2 Radkeile	2 Wheelwedges
Comfort opties	Komfort Optionen	Comfort options
11-4-8 VALX / Mercedes-Benz / SAF schijf BPW trommelremmen	VALX / Mercedes-Benz / SAF Scheibe BPW Trommelbremsen	VALX / Mercedes-Benz / SAF disc BPW drumbrakes
11-2-17 laatste as naloop gestuurd As 1 aut. / handm. liftas, as 3 handm.	Letzte Achse nachlaufgelenkt A. 1 aut. / man. Liftachse, A. 3 man.	Last axle steeringaxle A. 1 aut./man. liftaxle, axle 3 manual
11-15 ATO	ATO	ATO
19-65 Bandenmaat 385/65R22,5. Continental HTR2 /	Reifengröße 385/65 R22,5 Goodyear LHT II / GT /	Tyresize 385/65 R22,5 Michelin XTE3
19-7-3 Alcoa Durabright 6 alu velgen Reservewiel staal 385/65 of 55	Alcoa Durabright 6 alu Felgen Reserverad Stahlfelge 385/65 oder 55	Alcoa Durabright 6 alloy rims Sparewheel steel 385/65 or 55
09-1-1 Volledig schooperen Standard Coating in RAL 3002,	Völlig spritzverzinkt RAL 5002, RAL 5010, RAL 5015,	Full schooping RAL 7016, RAL 7021, RAL 9005
09-6-SP spuiten 2-laags 2K natlak naar keuze	Lackieren 2 Schicht 2K nach Wahl	2-Layer coating 2K customer choice
09-4-3 naven + doppen spuiten	Naben und Kappen lackiert	Hubs and caps painted
15-12 6x ronde 3-kamer lampen, alles LED	6x Runde 3-Kammerleuchten LED	6 Round lights, LED
05-QL-TR Quicklocks 6x	Quicklocks 6x	Quicklocks 6x
07-26 Rolletjes onder achterkoker	Rollen unter Heckausschub	Bearings for easier cranking out
07-3 Kingpenslohouder	Halter für Königszapfenverriegelung	Holder for kingpinlock
07-5 Gevaarlijke stoffen bord	Gefahrgutschild	ADR sign at the rear, orange
07-NS-9 Reclameplaat	Werbungstafel Stahl am Heck	Steel plate at the rear, painted
17-7 Documenten koker uit plastic.	Dokubox Kunststoff	Document tube
17-21 Brede spatlap onder de bumper	Breiter Schmutzfänger	Mudflap under bumper
21-10 Houder zonder 6 kg brandblusser	Halter ohne 6kg Feuerlöscher	Holder without 6kg fire extinguisher
21-8 Kingpinslot	Königszapfenverriegelung	Kingpinlock
03-4-A ADR-fabrikantverklaring	ADR Herstellerbestätigung	ADR Manufacturer certificate
25-NS-2 LZV uitgevoerd en gekeurd	nur für NL	only NL
17-2 ADR/VLG uitvoering incl certificaat	nur für NL	only NL

